


Panel | Acoustic

Wooly Mammoth

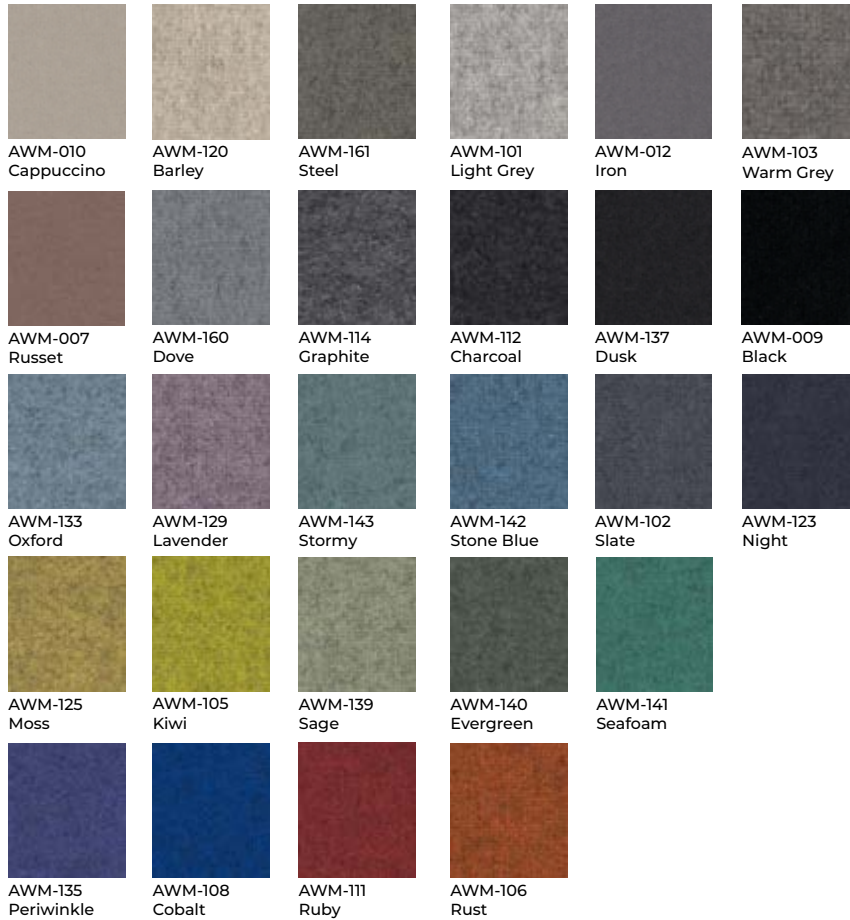

WOOLY MAMMOTH

Specification

Content 100% Pure Wool

Weight 410 g/m²± 15 | 18.50 oz/lin.yd

Width 55"

Role Length 27.34 yd

Miscellaneous

- Slight color differences between one lot and another have to be considered within commercial tolerance
- Mulesing free
- No VOC

Sustainability

OEKO-TEX® Certified

Performance

Flammability

ASTM E84 Class I or A

1.1M UNI 9175

BS 5852-1:1979

EN 1021-1&2:2014

California Technical Bulletin 117:2013

IMO - 2010 FTP CODE

NPFA 260-2019

EN 13772:2011

Sound Absorption:

UNI EN ISO 354:2003

Resistances

Abrasion: 50000 Martindale cycles

Light fastness (EN ISO 105-B02): 5

Fastness to rubbing (EN ISO 105-X12) Wet 4/5,

Dry 5

Pilling: 4

Panel | Acoustic



acousticalproducts.com